


Size



Specification

Type	Type	5kW Portable	RAD	kV	40~110kV (1kV Step ±8%)
	Max Power	5kW		mAs (mA)	0.32-200mAs (±10% +0.2mAs) (20-100mA (±20%))
	Weight	17.5Kg (±10%)		Collimator	* Manual Collimator * Ultrasound Sensor * Laser Pointer (SID- 100cm)
Input Power		AC	Operation Panel	FND&Membrane type	
		200-240V		Movement	Manual Movement
X-Ray Tube	Type	Monoblock	Other		Wired Exposure Switch
	Focus	Focal 1.8 mm			

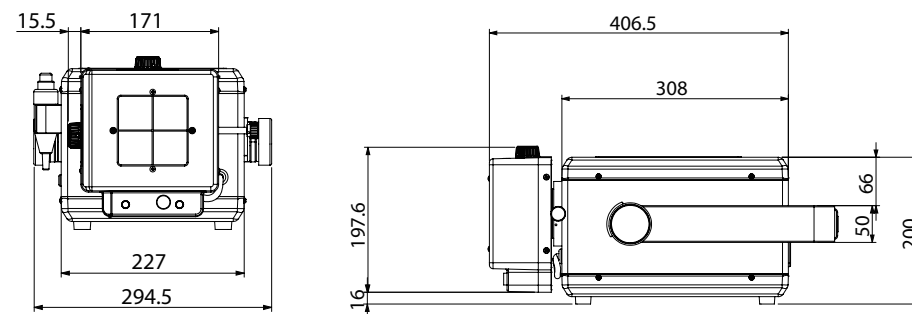

PORTABLE

SPX-050

5kW
200~240V AC TYPE



FND & Membrane Panel



Manual Collimation



Collimator Rotation 45°

SID

Laser Pointer (SID-100cm)



Wired Exposure Switch



Ultrasonic Distance Sensor

